



English	Technical data
01 Power	2 kW 6824 BTU/h
02 Frequency	50 / 60 Hz
03 Electric nominal heat input	2 kW 6824 BTU/h
06 Power supply cable type	H07RN-F
07 Voltage Power cable section Circuit breaker	230V ~1PH+PE 3G x 1,5 mm^2 16 A I1 9 A In 9 A
08 Cable Plug El. Conn. mode	Schuko -
09 RCD / GFCI	AC
13 Cavity dimensions (w x d x h)	1 x 400X300 x undefined mm 1 x NaN-NaN/16" x NaN-NaN/16"
15 Max. temperature	400 °C 752 °F
14 IP protection class	X3

Français
01 Puissance électrique
02 Fréquence
03 Puissance calorifique nominale électrique
06 Type de câble d'alimentation
07 Tension Section câbles d'alimentation Disjoncteur
08 Câble Prise Branchement électrique
09 RCD / GFCI
13 Dimension de la cavité (l x p x h)
14 Niveau de protection IP
15 Température max.

Deutsch
01 Elektrische Leistung
02 Frequenz
03 Elektrische Nennwärmeleistung
06 Stromkabel Typ
07 Spannung Stromkabel Teil Sicherung
08 Leitung Stecker Elektrischer Verbindungsmodus
09 RCD / GFCI
13 Abmessungen des Hohlraums (B x T x H)
14 IP-Schutzart
15 Maximale Temperatur

Terms and conditions of installations - Observe all local specific standard and regulations for installation and operations.



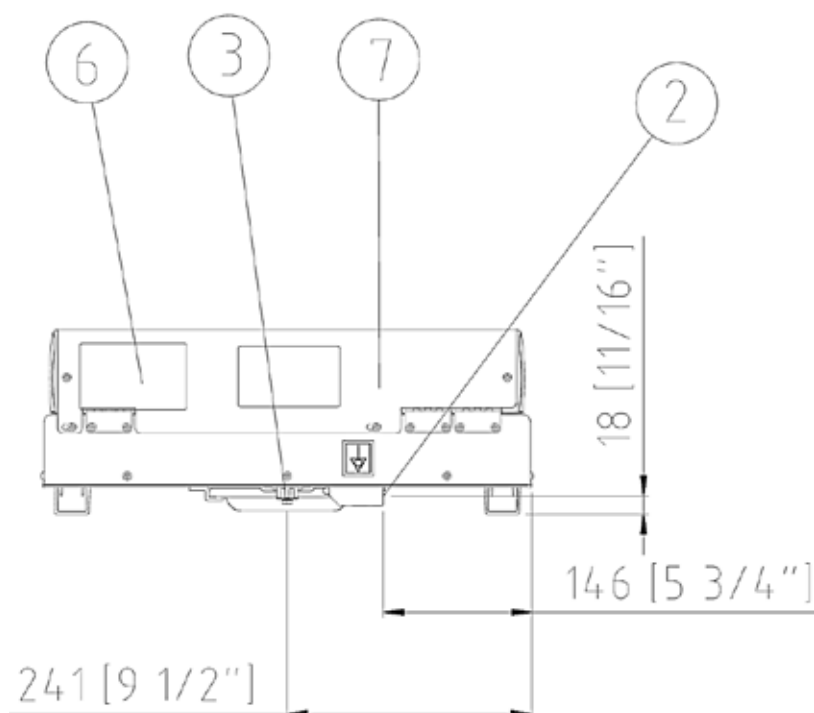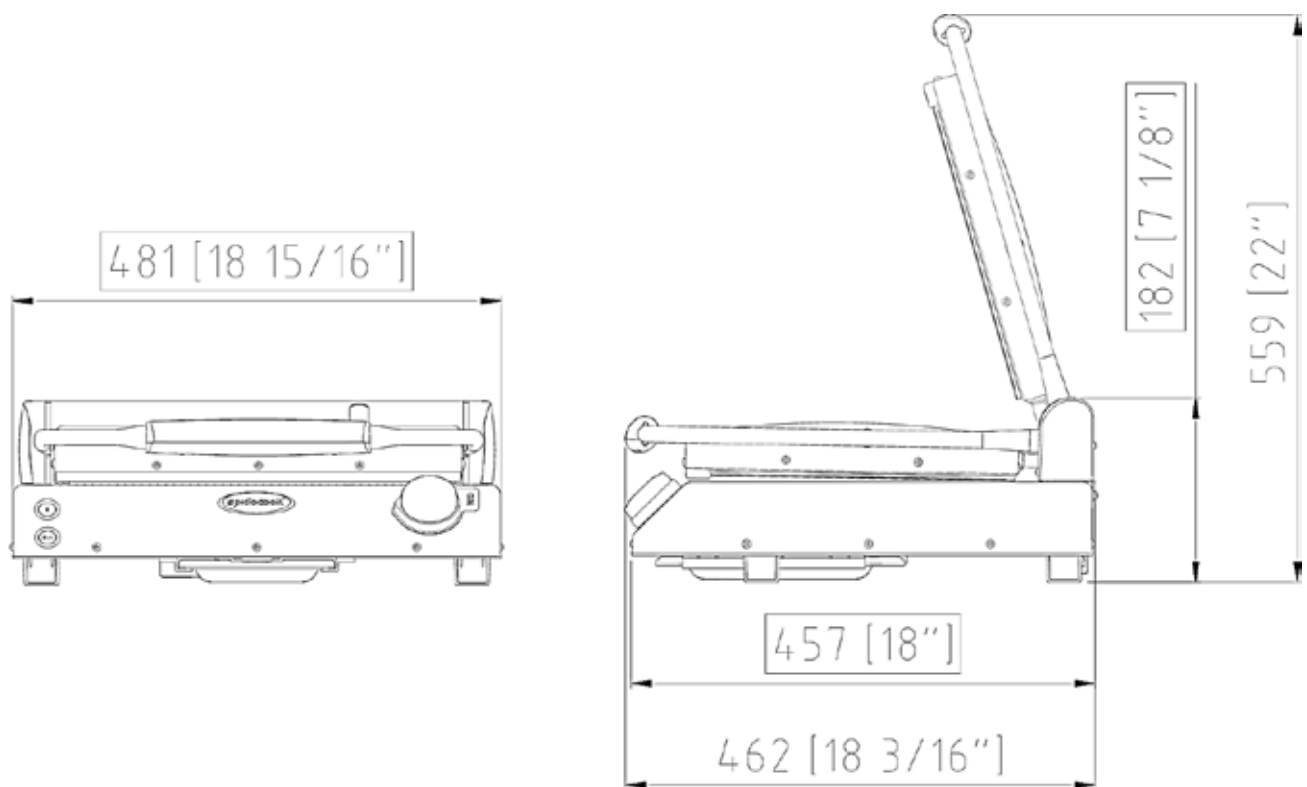

	English	Français	Deutsch
02	Electrical connection	Raccordement électrique	Elektrischer Anschluss
08	Water connection	Raccordement à l'eau	Wasseranschluss
11	Water drain	Evacuation	Abflussrohr
12	Smoke exhaust	Aspiration des fumées	Abluftrohr
13	Accessories connection	Connexion des accessoires	Anschluss des Zubehörs
31	Air inlet	Entrée d'air	Lufteinlass

